

# Fire Extinguisher PA50U-CE

ABC powder based fire extinguisher pressurized with nitrogen



Prod. no.: AF 400t

Extinguishing agent: .....ABC Powder  
Nominal charge: .....50 kg  
Jet length: .....9 mt at +20°C  
Discharge time: .....50 sec. at +20°C

### 1: Vessel

Diameter: .....300 mm  
Min. thickness: .....2.5 mm  
Material: .....Steel DD12 (UNI EN 10111)  
Working pressure: .....15 bar at +20°C  
Test pressure: .....30 bar at +20°C  
Burst pressure: .....75 bar at +20°C

### 2: Filling cap Ø2" complete with:

Spring safety valve set at 22 bar +/- 2  
Cap body: .....Brass

### 3: Discharge hose

Length: .....4 metres  
Diameter: .....16 x 26 mm  
Burst pressure: .....60 bar  
Material: .....Wire braided rubber

### 4: Discharging apparatus

Horn: .....Polypropylene  
Pistol: .....Plastic

### 5: Manometer Ø23

Material: .....Brass

### 6: Wheels

Diameter: .....300 mm  
Material: .....Hard rubber/PVC


### Overall dimensions

Height: .....1,170 mm  
Depth: .....550 mm  
Width: .....480 mm  
Weight: .....82 kg

### Painting cycle

Deep sandblasting Epoxy powder painting: .....50 µm  
Colour, cylinder: .....Red RAL 3000

Filled with 50 kg ABC multipurpose dry chemical powder

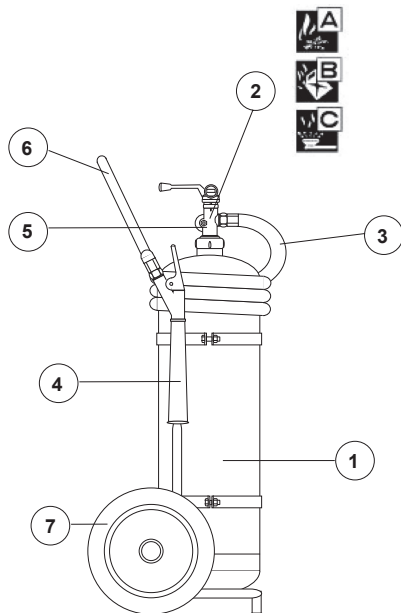

Lotek - Fire Extinguisher PA50U-CE - 120112

